

DAYTIME RUNNING LIGHTS

Description – Daytime Running Lamp
Model – Y61 GU Patrol Wagon
Part Number – GUDRL-0512

Tools Required – Large Blade Screwdriver
 Side Cutters
 Square nose Pliers
 10mm Spanner

Kit Content -

LED Harness	x 1
Cable Ties (200mm)	x 7
Wire Tap	x 1

Open the bonnet. Clean both headlights and front indicators. Ensure all grime and grease is removed to allow maximum adhesion of the adhesive tape on the LED strips.

Take the LED strip from the kit and lay across the top of the grill with the long end of the harness to the L/H (passengers) side of the vehicle.



Starting with the R/H headlight, pass the short leg of the harness on the LED strip under the grill mount then down the gap between the headlight and the grill as shown.

Repeat this process on the L/H side.



Remove the protective backing from the R/H LED strip and position on the lower edge of the headlight as shown. Ensure the bend at the connection between the harness and the LED strip finishes at the corner of the headlight glass. The vertical portion of the LED strip is fixed to the indicator and follows the edge of the headlight.

Repeat this step for the L/H side.




Using two of the cable ties provided, secure the harness to the inner grill mounts.


Repeat step 2 for the L/H side



Route the remaining branch of the harness through the hole in the firewall directly behind the R/H headlight.

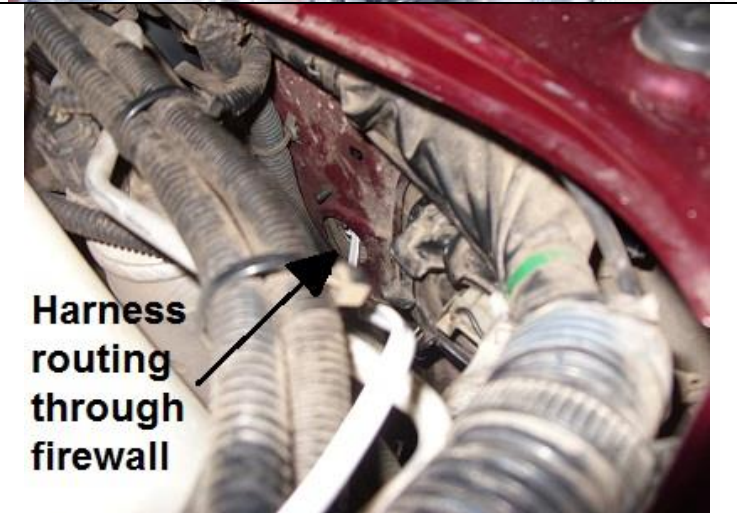


Continue to route the harness along the vehicles harness on the R/H side inner guard. Secure to the vehicle harness in the positions shown using cable ties.

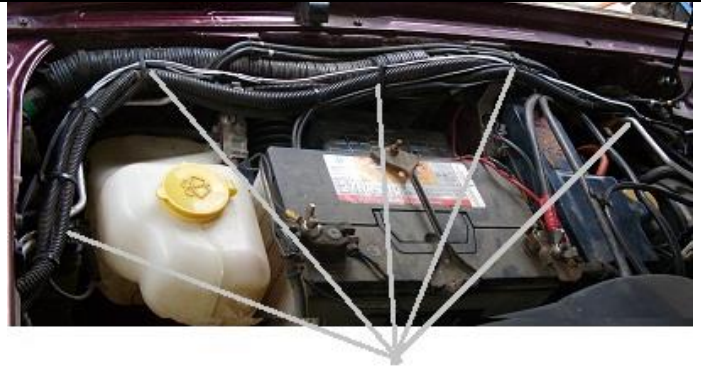

Cable tie in locations shown

Remove the lower L/H bolt from the wiper motor and secure the earth terminal under the bolt head. Using the wire tap, secure the power wire to the **Blue** wire in the upper left corner of the wiper motor terminal.

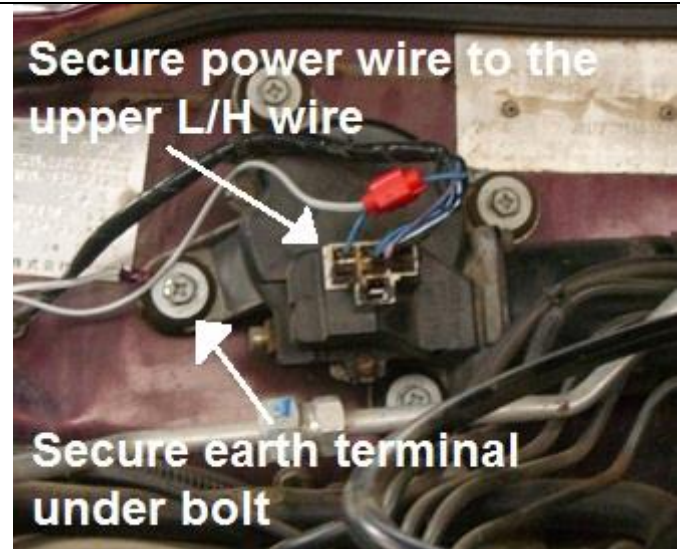

Test the operation by switching the ignition on.

